

SHURE®

LEGENDARY
PERFORMANCE™

SHURE
UA846Z2

GLX-D Frequency Manager

SHURE
GLXD4R



SHURE
GLXD4R



SHURE
GLXD4R



SHURE
GLXD4R



SHURE
GLXD4R



SHURE
GLXD4R



GLX-D® ADVANCED



GLX-D® ADVANCED



A -

- -
 -
 -
- /
 -
 -
 -
 - 2.4 GHz

GLXD4R

-
-
-
-
- LCD
- XLR ¼
-
-

LED



1

- GLXD4R
 -
 - GLXD1
 - GLXD2
 -
 - 30
 - 20
 - 16
 -
 -
- 60
 - 50

SM58®



GLX-D® Advanced

GLX-D

1. GLX-D

-
-
- 2.4 GHz
-

GLXD4R



2. GLX-D

-
- (11)
- Advanced

9

GLX-D



A 05 - A

- 8dB
- 2.4GHz
- 24dB



A505

PA805Z2-RSMA UA8-Z2



A

50 6 25 50 100


3.


GLX-D

4.

GLX-D

USB



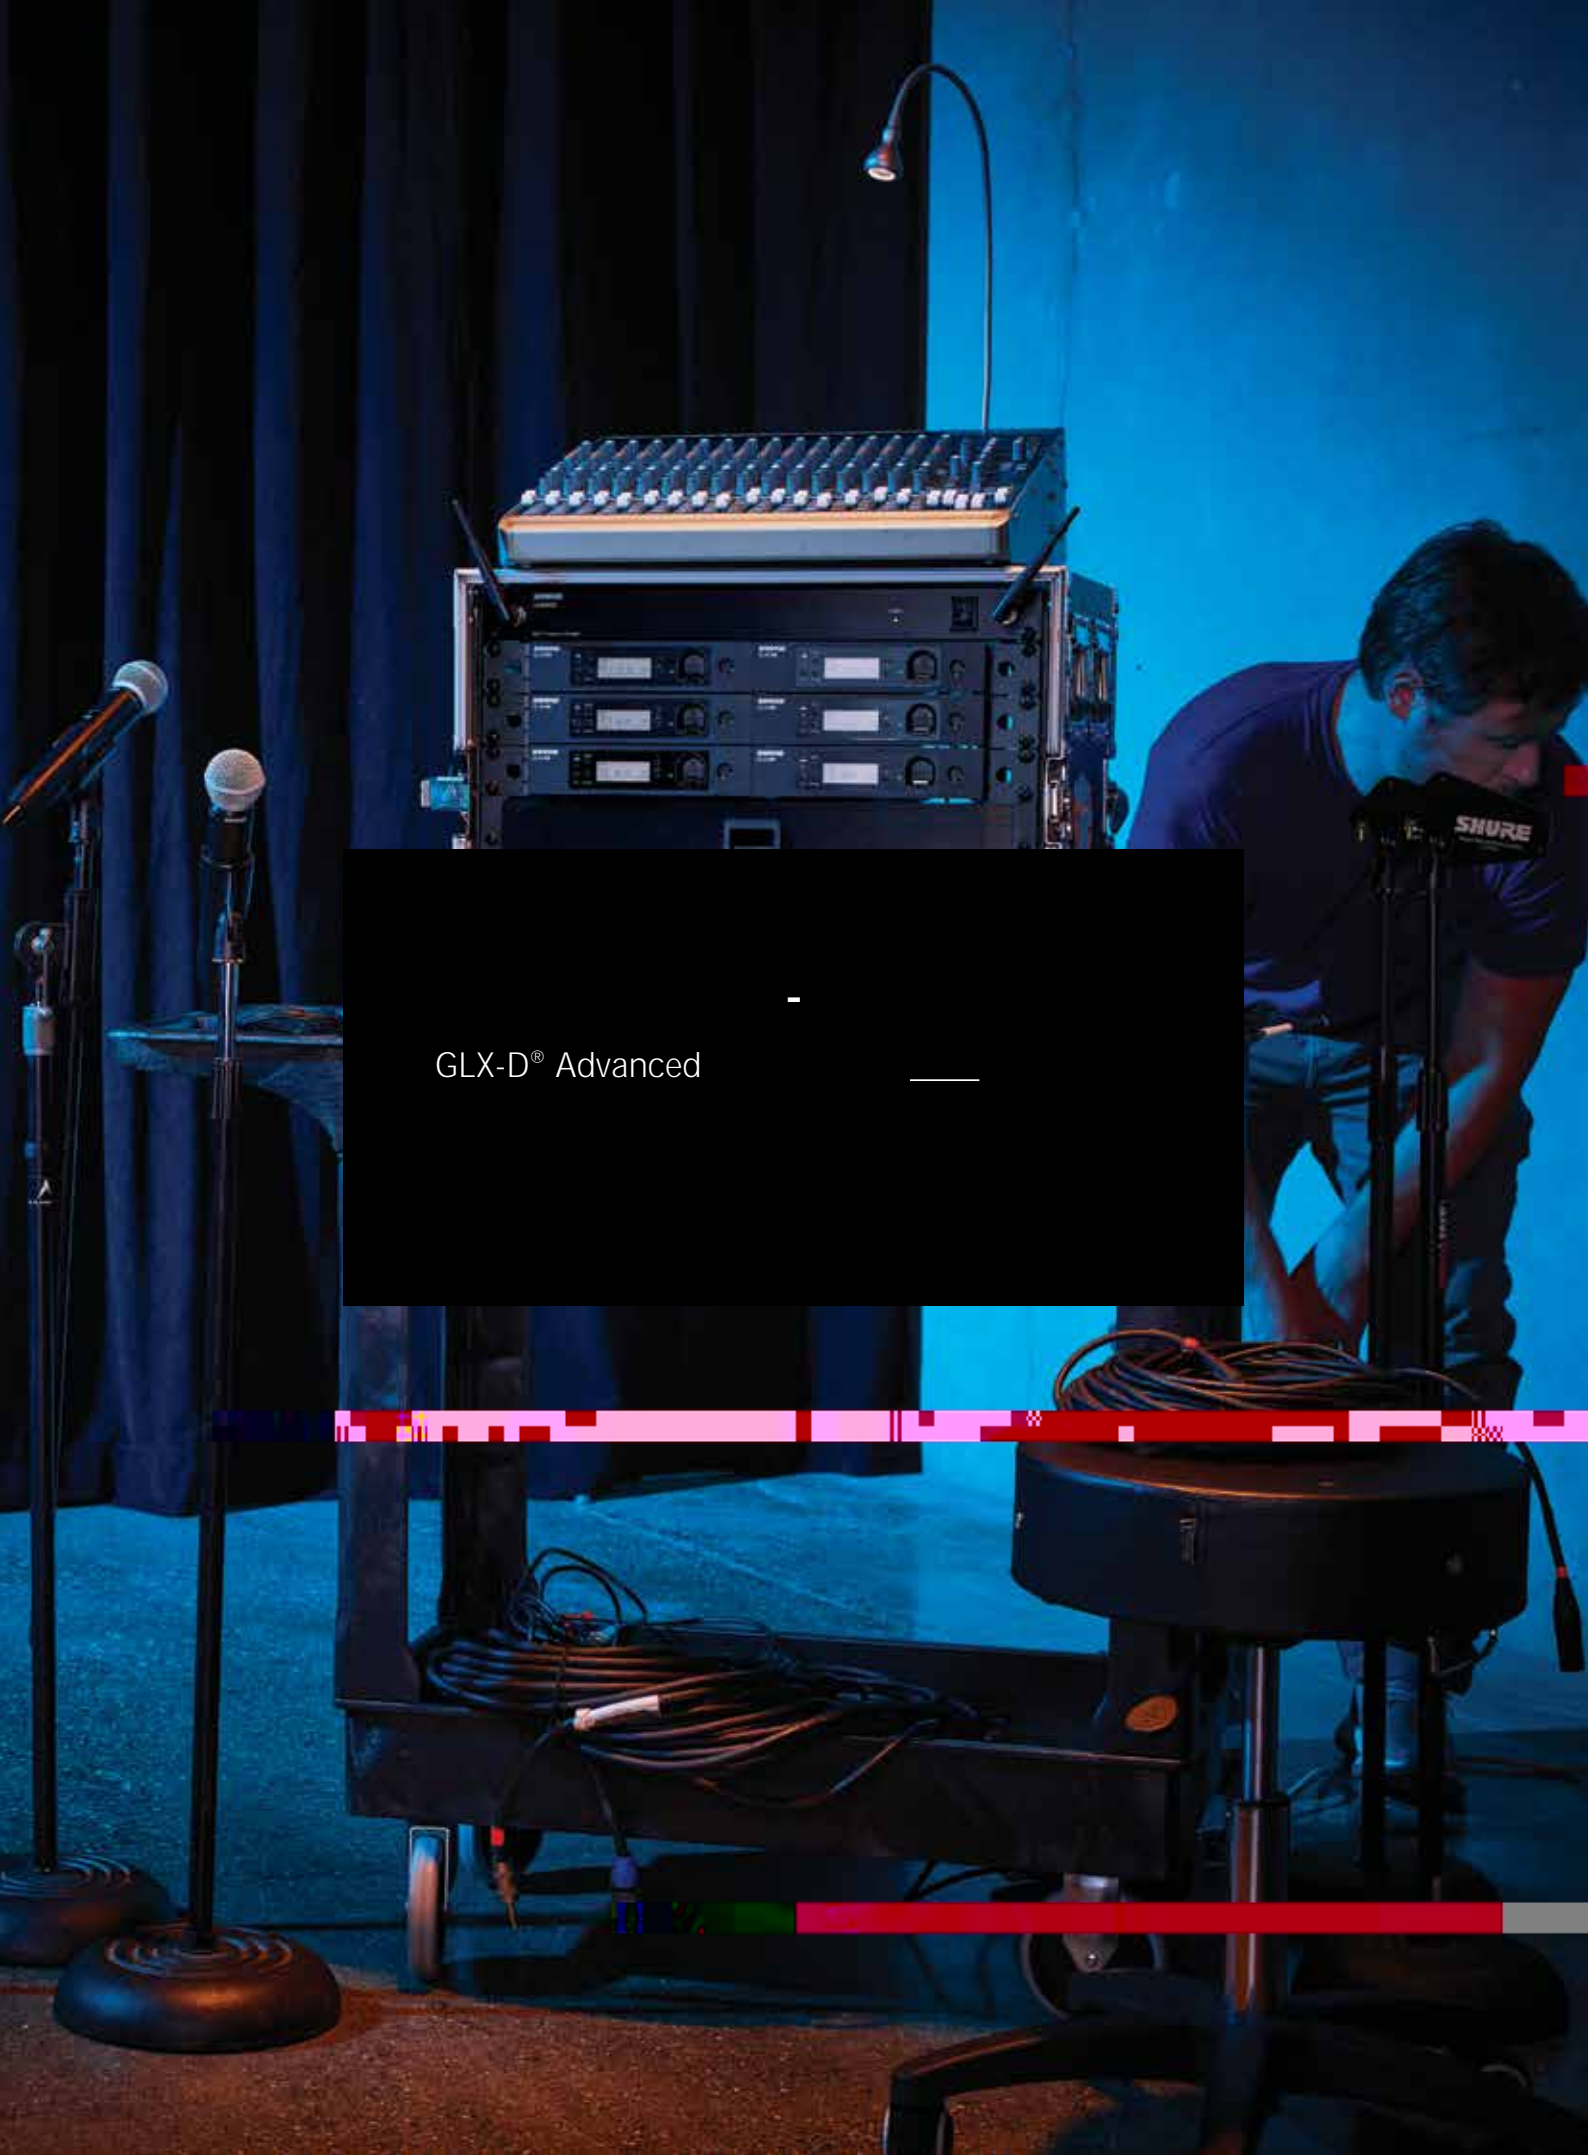

GLX-D® Advanced

	A		A 05 - A
9 11	15 VDC	42 × 197 × 163 (× ×)	<2.1 (VSWR) 2050 2700 MHz
30 (100) 60 (200) 20 (65) 50 (165)	15 VDC (× 6)	907.2	(2.45 GHz) 8 dBi
GLX-D	-18 °C 63 °C(0 °F 145 °F)	3.8 A()	3 dB 100
20 Hz – 20 kHz	45 × 483 × 192 (× ×)	14 18 VDC()550 mA	(2.45 GHz) 89%
120 dB A	1.63	-18 42 dB(1 dB)	50
1 /A 4.0 2 3 4 /B 7.3	SMA	/	(2.45 GHz) 24 dB
-88 dBm()	2400 2483.5 MHz	30 dB	SMA
0.2%()	35 dB()	50	105 × 164 × 27.5 (× ×)
10 mW E.I.R.P.()	50	½	70
-18 °C (0 °F) 57 °C (135 °F)	-10 dBm	-20 dBm	
-29 °C (-20 °F) 74 °C (165 °F)	+15 dBm		
() 3)	WA302 SMA 2() 1/4		6.35 (1/4)
16	2400 2483.5 MHz (OIP3)		100 100 (50)
/	48 dBm()		+18 dBV +12 dBV
	50		-12 dBV
	35 dB()		1= 2= 3=
	-3 0 dB		= = =

1			
90.4 × 64.5 × 22.9 (× ×)		(SM58)	10 mW E.I.R.P.()
3.7 V	(1 kHz 1%)+ 8.4 dBV (7.5 Vp-p)	252 × 51 (×)	145 dB SPL
900 k	TA4M	(SM58)	
10 mW E.I.R.P.()	1 () 2 +5 V 3 4	267	
4 (TA4M)	() 4)	3.7 V	