

SHURE®

LEGENDARY
PERFORMANCE™

ULX-D™





ULX-D™



ULX-D



15 12



Workbench™ 6

Dante™

Wireless

ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



24- /48 k A 256
 20 20 k
 120 B 6
 60 B A 600 A
 A /
 72
 8 23 63 1/2
 8 63

120

A 256

900

11

2 AA

200

11



100

58




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

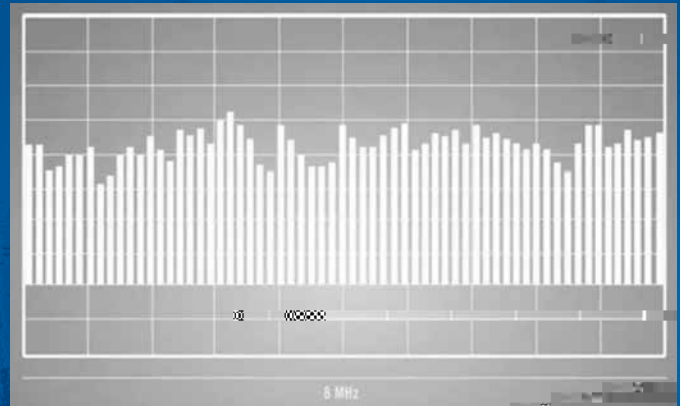

8MHz 63

 Dante™

Dante IP

- Dante
 - Dante
 - ULXD4D ULXD4Q
- ULX-D



ULX-D

- ULXD4D ULXD4Q

470 932

>70

<2.9

-98 10⁻⁵

100

20 -20

@ +10

>120 A

130

A

<0.1%

12

@ +10

-18 (0) -50 (122)



171, 197, 42

482, 274, 44

0.9

3.36

3.45

15 @ 0.6 A

100 - 240 A 50-60 0.26 A

100 - 240 A 50-60 0.32 A

-18 +42 1

¼ 6.35 +12

+18

-12

10/100

1

86, 66, 23

256, 51

142

340

@ 10 mW

900 11

2 AA 11

1 , 10 , 20

¼