

# SHURE®

LEGENDARY  
PERFORMANCE™

ULX-D™





## ULX-D™



ULX-D



15

12



Workbench™ 6

Dante™

Wireless

## ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D



120

A 256

900

11

200

2 AA

11



100

58




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

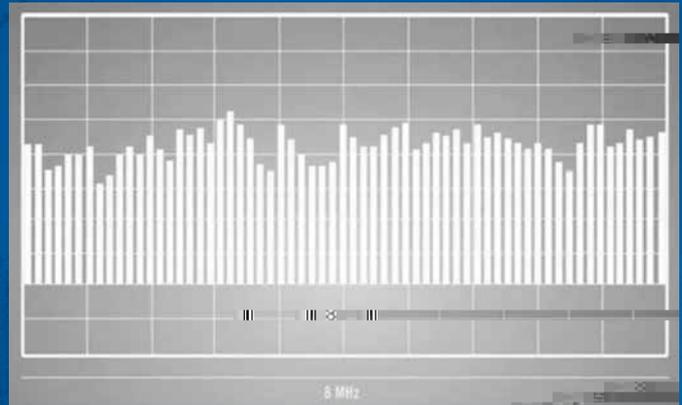

8MHz 63



Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

470 932
>70
<2.9
-98 10 <sup>-5</sup>
100
20 -20 ↵
>120 A
@ +10 ↵ 130 A
<0.1%
12 ↵ @ +10
-18 (0 ↵ -50 (122 ↵



↵ 171, 197, 42 ↵ ↵
↵ ↵ ↵ 482, 274, 44 ↵ ↵
↵ 0.9
↵ ↵ 3.36
↵ 3.45
↵ 15 ↵ @ 0.6 A
↵ ↵ 100 - 240 A 50-60 0.26 A
↵ 100 - 240 A 50-60 0.32 A
-18 +42 1
¼ 6.35 +12 ↵
+18 -12
↵ 10/100
↵ ↵ ↵ 1
↵ ↵ ↵
↵
↵ ↵ ↵

↵ 86, 66, 23 ↵ ↵
↵ 256, 51 ↵
↵ 142
↵ 340
@ 10 mW 900 11
2 AA 11
1 , 10 , 20
↵
↵
↵ ¼
↵