

SHURE®

LEGENDARY
PERFORMANCE™

ULX-D™





ULX-D™

ULX-D



ULX-D



ULX-D



15

12



ULX-D

(AES) 256




Workbench™ 6

Dante™

Wireless



ULX-D

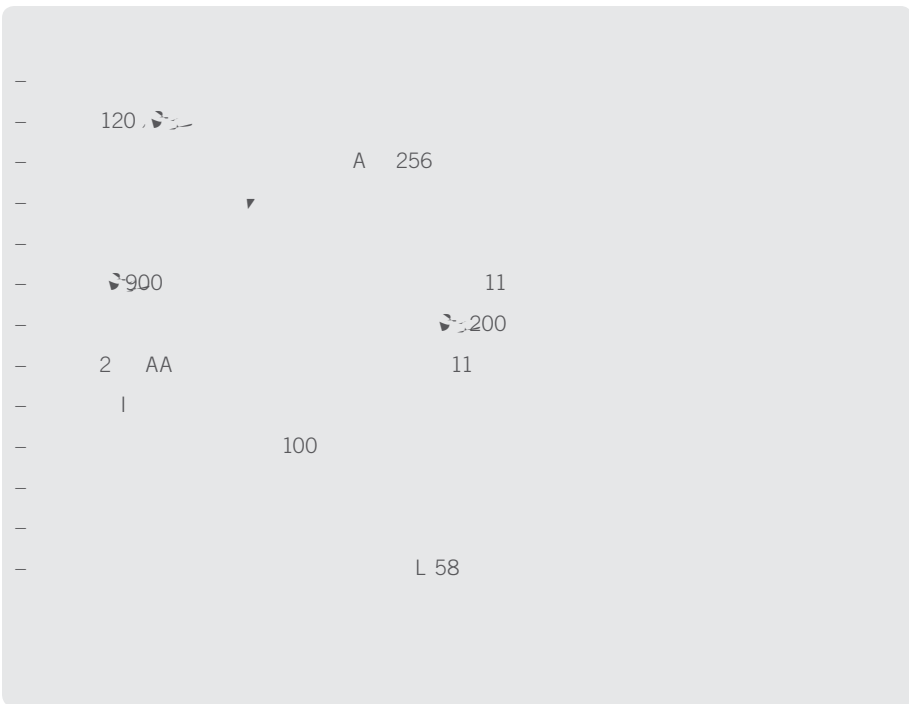




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

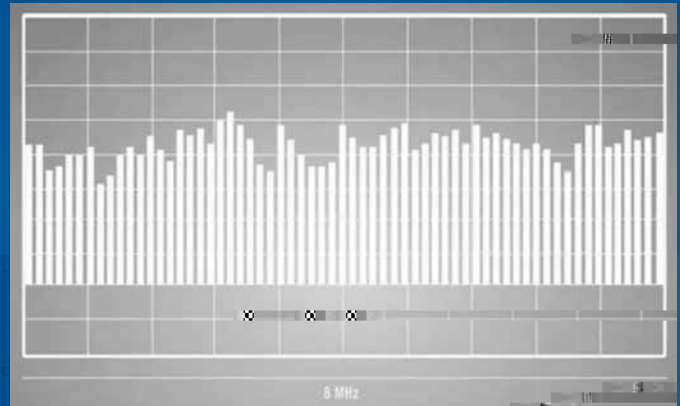

8MHz 63



Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

470 932 L
>70
<2.9
-98 10 ⁻⁵
100
20 -20 ⁴
>120 A
@ +10 130 A
<0.1%
12 @ +10
-18 (0) -50 (122)



4 171 197 42
4 482 274 44
4 0.9
4 3.36
4 3.45
4 15 @ 0.6 A
4 100 - 240 A 50-60 0.26 A
4 100 - 240 A 50-60 0.32 A
-18 +42 1
6.35 +12 4
+18 -12
4 10/100 L
4 4 1
4
4 4

1 86 66 23
2 256 51
1 142
2 340
@ 10 mW 900 11
2 AA 11
11, 1011, 2011
1
2
1 / ⁴
2