

SHURE®

LEGENDARY
PERFORMANCE™

ULX-D™





ULX-D™

ULX-D



ULX-D



ULX-D



15 12



ULX-D

(AES) 256



Workbench™ 6

Dante™

Wireless



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



24- /48κ
 20 _ 20κ
 120
 60
 72 _
 8 _

8 _

23

63

A 256

_ _ κ _ 16

A 600 A _

A_ / _ _

1 ,

120

A 256

900

11

200

2 AA

11

100

_58) 0 .4.6.165 9>-6 () f 2 1 -0.018 0.018 .1.148 0 0 6 >-12>-28654<0A9>-41<1 0 A> 1




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

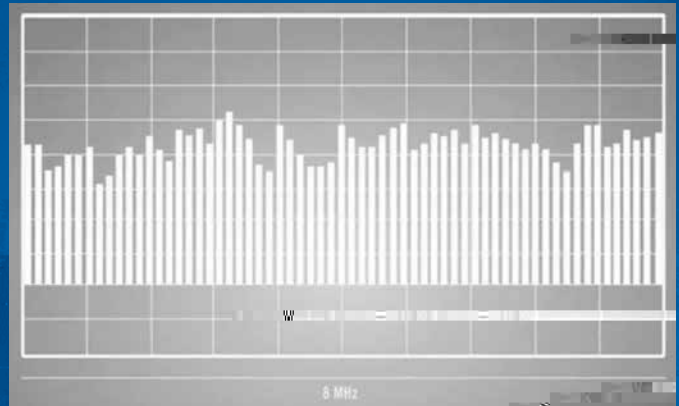

Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

470.932 _

>70

<2.9

-98 _ 10^{-5}

100

20 -20x

>120 A

@ +10

130

A

<0.1%

12 10^{-4}

@ +10

-18 (0.6) - 50 (122.6)

4 171 197 42

4 4 482 274 44

4 0.9

4 3.36

4 3.45

4 15 @ 0.6 A

4 100 - 240 A 50-60 0.26 A

4 100 - 240 A 50-60 0.32 A

-18 +42 1

6.35

+12

4

+18

-12

4 10/100 _ _

4 4 1 _

4

4 4

1 86 66 23

2 256 51

1 142

2 340

@ 10 mW

900

11

2 AA 11

1 _ , 10 _ , 20 _

1

2

