

# SHURE®

LEGENDARY  
PERFORMANCE™

ULX-D™





ULX-D™

ULX-D



ULX-D



ULX-D



15 12



ULX-D (AES) 256



Workbench™ 6

Dante™

Wireless



ULX-D

# ULX-D™

## ULXD4



## ULXD4D



## ULXD4Q



24-	/48	κ								A	256
20		20	κ								
120		■	♭							κ	♯6
60		■	♭							A	600 A
										A	/
72											
8											½
							23				
											63

120

A 256

900

11

2 AA

200

11



100

58




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

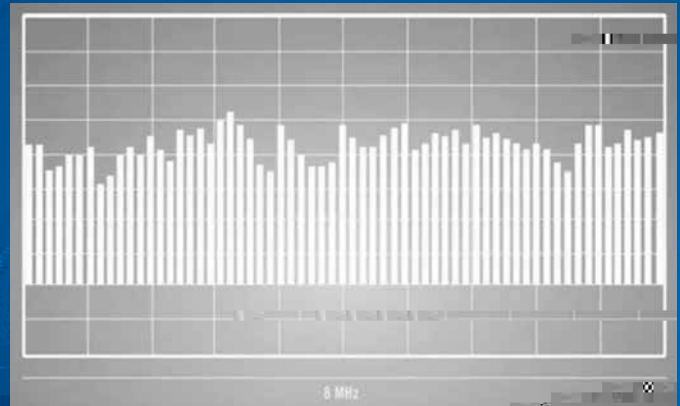

8MHz 63



Dante IP

- Dante
- Dante
- ULXD4D ULXD4Q

ULX-D



ULX-D

- ULXD4D
- ULXD4Q

470 932
>70
<2.9
-98 10 <sup>-5</sup>
100
20 -20
@ +10 >120 A 130 A
<0.1%
12 @ +10
-18 (0) -50 (122)



171, 197, 42
482, 274, 44
0.9
3.36
3.45
15 @ 0.6 A
100 - 240 A 50-60 0.26 A
100 - 240 A 50-60 0.32 A
-18 +42 1
¼ 6.35 +12 +18 -12
10/100
1

86, 66, 23
256, 51
142
340
@ 10 mW
900 11
2 AA 11
1 , 10 , 20
¼